



MAGNAWAND ID2100 Magnetic Locator + Identifier

With Patented (TID™) Target Identification System

Time is Money This Feature saves digging unnecessary holes



**Water Works
Municipalities**

**Professional land Surveyor
Utility Personnel Hydro/Gas**

**Construction
Road Dept's**



The ID2100 PINPOINTS
To 1 inch of center for
Valves and Curb Boxes

This utility personnel had no problem
locating a deep Valve Chamber using
TID which saved him time digging.



Excellent for finding old hidden **Culverts**
especially when the ends are snow covered.



The yellow tube is made of strong
ABS not Plastic. Unique End design
also protects the switches and the Personnel
will still be able to use the Controls when
wearing thick Gloves.

Valves & Curb Boxes up to 9ft deep
Survey markers up to 8 ft deep.
PK nails up to 14 " deep.
Manhole covers; Catch Basins;
Cast-Iron Pipes; Septic Tank Handles
Oil Tanks; Steel Drums; Well Casings

DISTRIBUTOR






IN SETTING 1: THE DETECTOR PERFORMS AS A BASIC MAGNETIC LOCATOR.

All Signals from ferrous metal objects including horizontal will be indicated with an AUDIO TONE and RED LED **NOTE:** No GREEN LED will show in Setting 1.

SETTING 2: PATENTED (TID) TARGET IDENTIFICATION SYSTEM. WE RECOMMEND USING (TID) FUNCTION AT ALL TIMES.

Its Simple to use you will love this feature

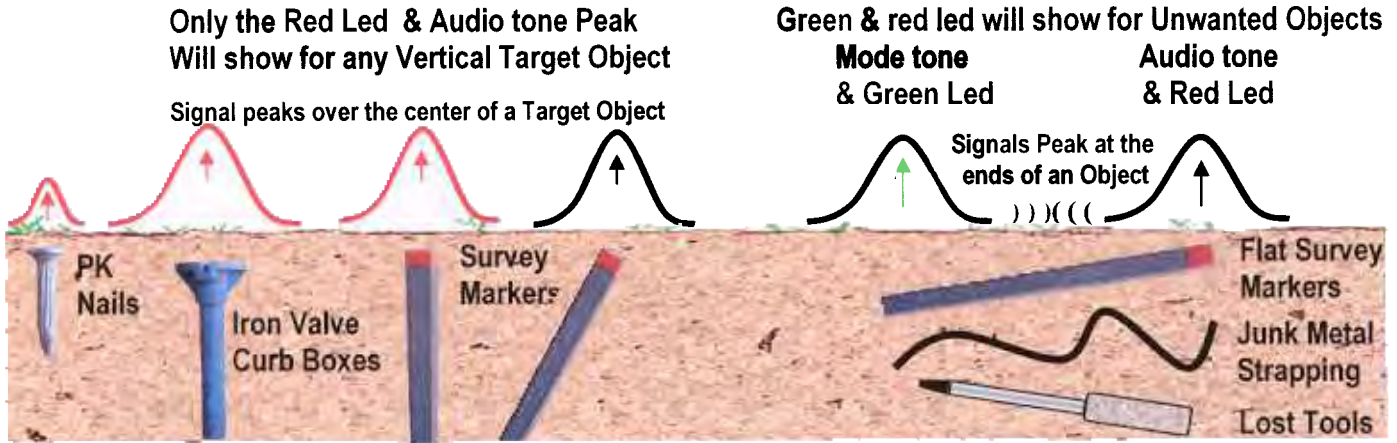

TID will save you time digging unnecessary holes especially in frozen or hard ground.

Unbeatable Locating Near Fence Lines



Hold the locator at an angle to the Fence the **Mode Tone** and **Green Led** will then appear. Next move the locator along the fence line. When a **Strong Audio tone** and **Red led** appears this will indicate a possible vertical target.

A strong audio peak & red led from a Vertical Target will over power the fence



The ID2100 can distinguish between the manhole cover and a close valve



Low Battery Indication and Easy Replacement
A pulsating tone will indicate Low Battery. During the pulsating tone the detector will still locate properly for some time before having to replace it. Loosen Screw 2 turns and push along the slot.

FOR MORE INFO CALL 905 669-6413 OR
WEB SITE WWW.MAGNAWAND.COM
SPECIFICATIONS : Volume increases automatically when object is detected
-Operating Temperature -13 to 140° F (-25 to 60° C) -Weights 2 lbs/0.9Kg
-Uses one 9 volt battery (55 hrs Intermittent use) Low battery indication.
-detector can be submerged in the water up to the handle grip 30".
-4 year warranty -not effected by ground metals - over all length 34 inches
-circuit board is surface mount technology and has a silicon protected coating.